


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	17270411	400L 15DEG DOSING CONE TANK	1
2	135326	Ø240 SCREW LID - FEMALE THREADED	1
3	17530004	400L & 500L 15DEG CONE BATCH FRAME	1

DESIGN DATA	
DESIGN PRESSURE: ATMOSPHERIC	MAXIMUM CAPACITY (LTRS): 455
DESIGN TEMPERATURE: 40°C	WORKING CAPACITY (LTRS): -
WORKING PRESSURE: ATMOSPHERIC	APPROX. WEIGHT FULL (KGS): 510
WORKING TEMPERATURE: 40°C	APPROX. WEIGHT EMPTY (KGS): 55
MOULDED LIFTING LUGS: 4 - 0°, 90°, 180° & 270°	
METHOD OF SUPPORT: FIRM, FLAT, FULLY SUPPORTING BASE OF CONCRETE OR OTHER SUITABLE MATERIAL	


MATERIAL DATA
MATERIALS OF CONSTRUCTION: MATRIX REVOLVE N-307. REVOLVE IS A HIGH DENSITY (0.939 g/cm3), LOW MELT (3.5 g/ 10 min) HEXENE POLYETHYLENE GRADE FOR ROTOMOULDING. THE GRADE IS FULLY PROTECTED AGAINST THERMAL AND LIGHT DEGRADATION: N-307 IS UV10 STABILISED.

INSPECTION AND TESTING
WORKS TEST: ALL TANKS ARE THICKNESS TESTED BY ULTRASOUND AFTER DEMOULD. IN ADDITION, AIR SUPPORTED LEAK TEST ARE CARRIED OUT ON FLANGE LINES.


NOTE SECTION

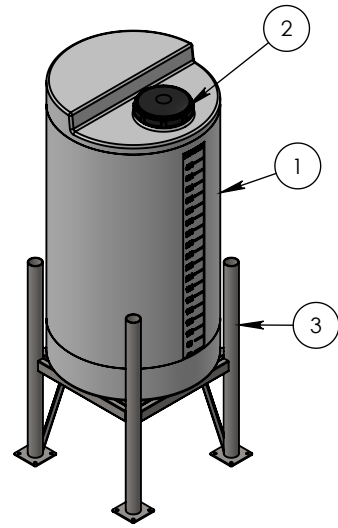


LEFT ISO VIEW  
SCALE 1 : 30

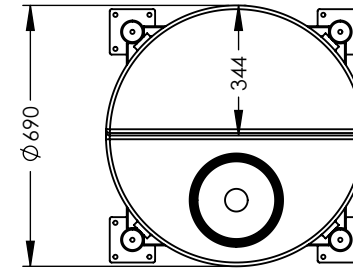

PLAN VIEW

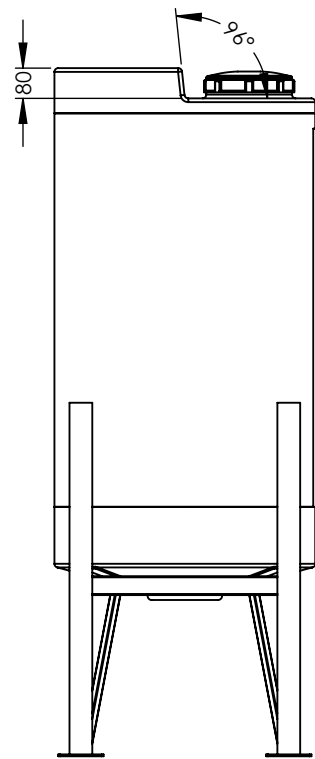


LEFT VIEW

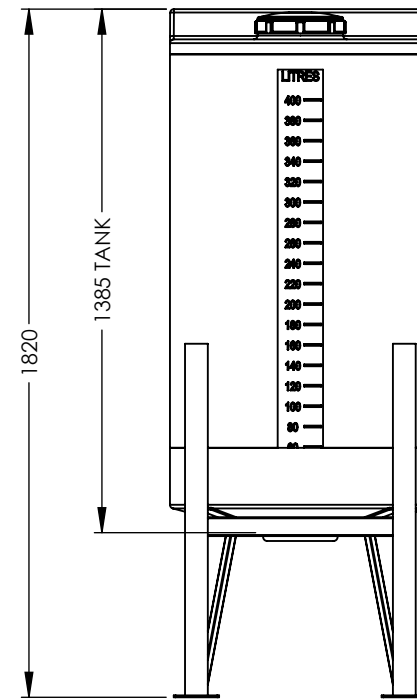

FRONT VIEW

	NAME	SIGNATURE	DATE
DRAWN	LC	L.Crane	27/02/2023
CHECKED			

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
SURFACE FINISH: MDPE  
TOLERANCES: ±3%



3RD ANGLE PROJECTION

DO NOT SCALE DRAWING      REVISION: A



DWG TITLE:  
400L 15DEG DOSING TANK

DWG NO: 17270411-400L-15CONE      A3

SCALE: 1:20      SHEET 1 OF 1