

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	172701	100L Slim dosing bund	1

DESIGN DATA	
DESIGN PRESSURE: ATMOSPHERIC	MAXIMUM CAPACITY (LTRS): L
DESIGN TEMPERATURE: 40°C	WORKING CAPACITY (LTRS): L
WORKING PRESSURE: ATMOSPHERIC	APPROX. WEIGHT FULL (KGS): kg
WORKING TEMPERATURE: 40°C	APPROX. WEIGHT EMPTY (KGS): kg
MOULDED LIFTING LUGS: 4 - 0°, 90°, 180° & 270°	
METHOD OF SUPPORT: FIRM, FLAT, FULLY SUPPORTING BASE OF CONCRETE OR OTHER SUITABLE MATEREAL	

MATERIAL DATA




MATERIALS OF CONSTRUCTION:

MATRIX REVOLVE N-307.
 REVOLVE IS A HIGH DENSITY (0.939 g/cm³), LOW MELT (3.5 g/ 10 min) HEXENE POLYETHYLENE GRADE FOR ROTOMOULDING. THE GRADE IS FULLY PROTECTED AGAINST THERMAL AND LIGHT DEGRADATION: N-307 IS UV10 STABILISED.

INSPECTION AND TESTING

WORKS TEST: ALL TANKS ARE THICKNESS TESTED BY ULTRASOUND AFTER DEMOULD IN ADDITION AIR SUPPORTED LEAK TEST ARE CARRIED OUT ON FLANGE LINES.

NOTE SECTION

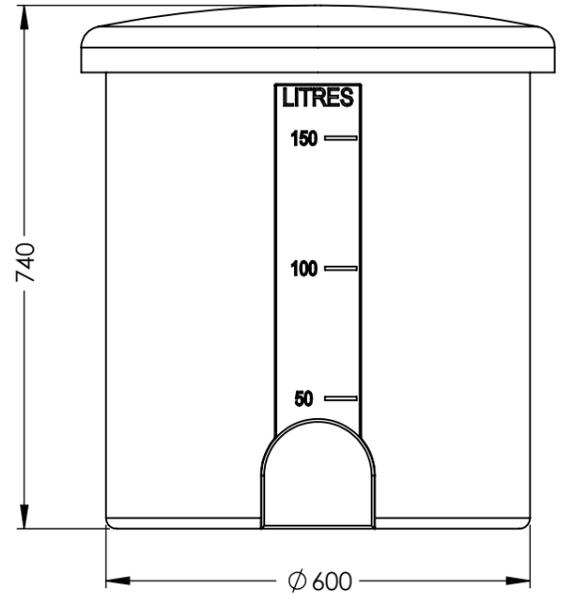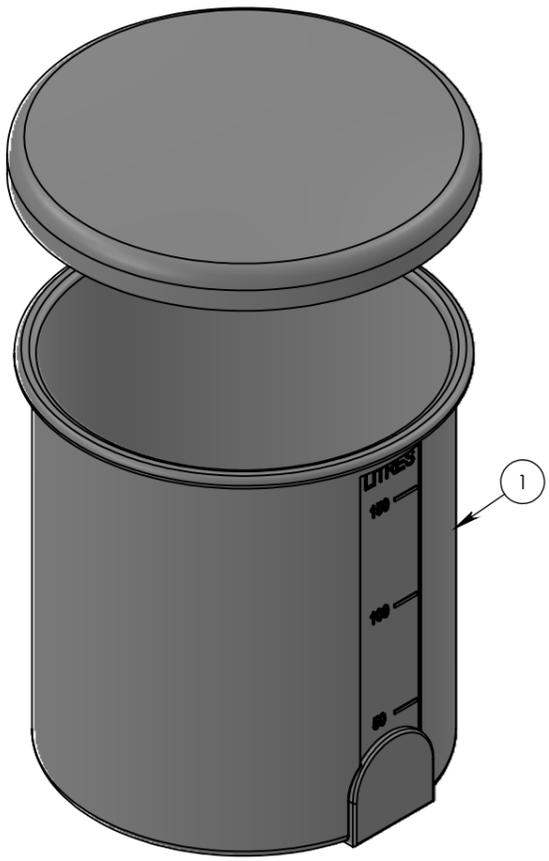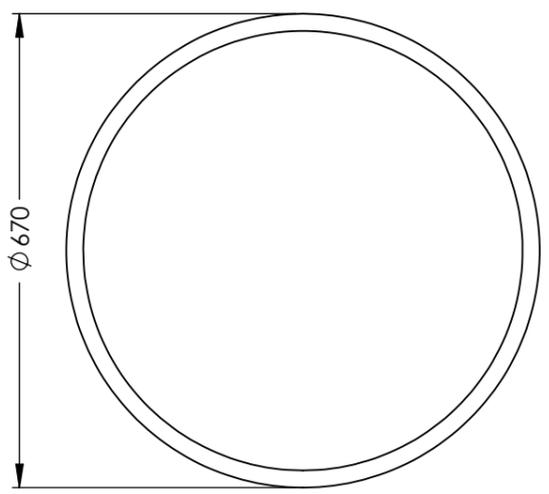

	NAME	SIGNATURE	DATE
DRAWN	LC	L.Crane	03/11/2021
CHECKED			

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH: MDPE
 TOLERANCES: ±3%

3RD ANGLE PROJECTION

DO NOT SCALE DRAWING REVISION: -

ENDURAMAXX®
 FLUID MANAGEMENT INNOVATION

DWG TITLE:
 Slim bund to suit 100L dosing tank

DWG NO: 172701-100L-BUND-S A3

SCALE: 1:10 SHEET 1 OF 1