



UNDERGROUND HORIZONTAL TANK INSTALLATIONS

GUIDANCE NOTES FOR NON-TRAFFICABLE
POLYETHYLENE UNDERGROUND TANKS; 1,500,
2,500, 3,500, 5,000 & 10,000 LITRE

www.enduramaxx.co.uk
sales@enduramaxx.co.uk

ENDURAMAXX[®]



INSTALLATION INSTRUCTIONS

CHECKLIST BEFORE INSTALLATION

Congratulations on purchasing this quality underground tank product from Enduramaxx. This tank is made from 100% polyethylene which has a high durability and resistance to environmental influences. If the tank is filled with anything other than water, this must be approved by the manufacturer. The manufacturer assumes no liability for misuse of any kind if this has not been approved in advance.

Having selected the site for the underground tank, check with all available maps and plans to ensure there are no concealed obstructions, existing pipes, cables, trunking, etc. that cross or impinge on the site. Under all circumstances, a physical survey should also be carried out for the suitability of the ground, maximum groundwater levels which occur and drainage capability of the subsoil and types of loads which occur prior to installation.

Ask your Local Authority if in doubt.

A pre-survey of the site will also reveal any potential difficulties with flooding caused by the water table itself, run-off drainage from surrounding areas, ground saturation in storm conditions, or tidal conditions (if applicable).

- Maximum groundwater depth of 2m from base of tank must not be exceeded.

WARRANTY

Where it is necessary to install the underground tank in ground where there are potential flooding problems, care should be taken to ensure that the tank cannot be forced out of the ground by the upward pressure of any ground water in the excavation. It should be noted that an underground tank will, when empty, float on as little as 50mm (2") of water, and the upward thrust of that tank fully immersed in water can be surprisingly high. For sites where the water table is above the bottom of the tank, the use of cement slurry as a bed will prevent the base of the tank from buckling. In any case, always ensure that:

- There is no damage to the tank. Inspect carefully for any damage from contact with sharp objects or by mishandling during transport to site or off-loading.
- The tank is surrounded in concrete to the top.

IMPORTANT NOTE

Installation of this tank must be undertaken only by suitably qualified and experienced personnel.




ENDURAMAXX[®]

www.enduramaxx.co.uk



NON-TRAFFICABLE INSTALLATIONS

1. Check the depth (invert) of the inlet pipe as this will determine the excavation depth – see tank inlet specification.
2. The recommended size of the excavation hole should be 500mm on each side more than that of the tank. The excavation hole must be horizontal and guarantee sufficient load-bearing capacity.
3. Ensure any water is pumped from the installation hole during installation, we recommend lining the walls with a heavy-duty sheeting to act as a waterproof membrane.
4. Lay a minimum of 200mm (8") of 20mpa concrete in the bottom of the excavation hole and level.
5. When the base is hard, using suitable lifting equipment - lower the underground tank gently onto the base, ensuring that no stones or other sharp objects are allowed to fall in at the same time, or damage to the tank may result. Fill the tank with water to act as a ballast.
6. Once the tank is in place, check for level and position, and backfill around the tank with concrete allowing for 200mm overlap at the top of the tank. Concrete must be tampered in around the tank (mechanical compaction machines must not be used). Damage to the tank must be avoided during compaction.
7. You must progressively fill the tank with water to the level of the backfill to stabilise pressures on the tank. This water should remain in the tank until the concrete has fully hardened.

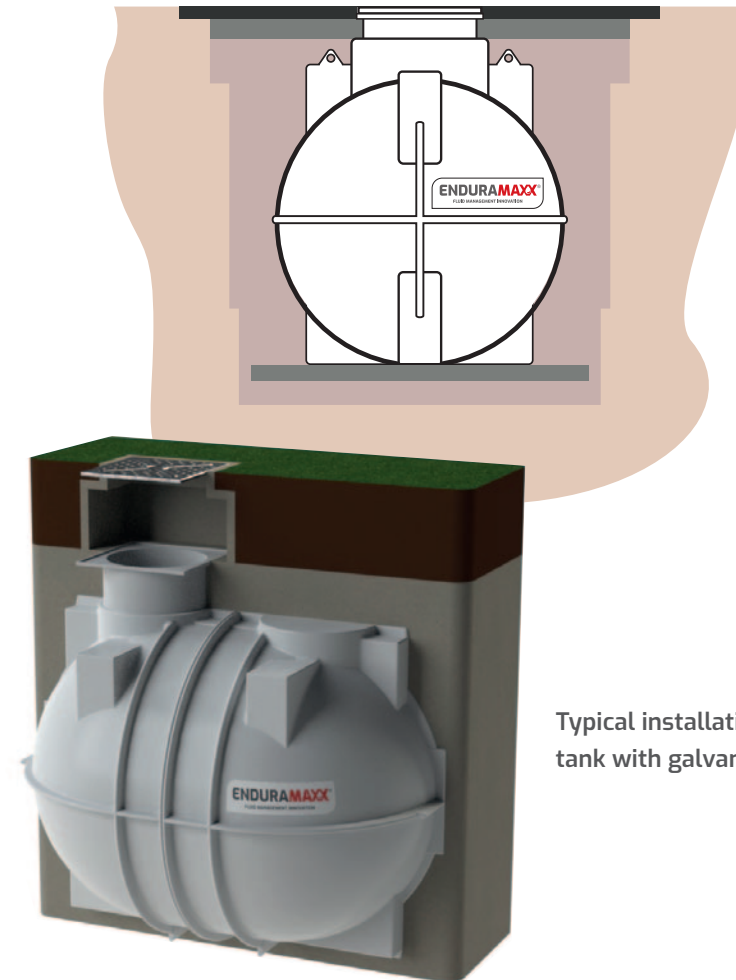

Typical installation for tank with galvanised lid.



ENDURAMAXX[®]

www.enduramaxx.co.uk



WATER
TANKS




WATER
BOWSERS



SOLUTIONS
FOR ALL



RAINWATER
FILTER KITS
& GUIDES



CHEMICAL
TANKS



RAINWATER
HARVESTING



CUSTOM &
FABRICATED
TANKS



EXPERTISE
ALWAYS
ON HAND



PARTS &
ACCESSORIES



SPECIALIST
TANKS

TELEPHONE
01778
562810

SOLUTIONS FOR ALL

ENDURAMAXX[®]

www.enduramaxx.co.uk
sales@enduramaxx.co.uk